

APPLICATIONS

- Powerchairs / home mobility equipment
- Scooters, 3- and 4 wheels
- Cleaning Machines
- Personal Carriers
- Utility Vehicles

SPECIFICATIONS

Nominal Voltage	12V	
Nominal capacity @20 hour rate	68Ah	
Capacity at 25°C	10 hour rate	60Ah
	5 hour rate	56Ah
	1 hour rate	37Ah
Shelf time @20°C up to 70%	in months	12
Internal resistance (at 1 KHz)	approx. 7,2 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

DIMENSIONS

Dimensions LxWxH (T) in mm	260x168x179 (180)
Weight	21,5kg (±2%)
Electrolyte	Sulfuric Acid Thixotropic GEL
Case and cover	ABS
Terminal	Female M6
Torque setting (recommended)	M6: 5 Nm
Maximum allowable torque value	M6: 7 Nm

CHARGING


- Charging Voltage cycle use 14,4 to 15 Volt
- Float charge Voltage 13,5 to 13,8 Volt
- Charging current, minimum 6A - maximum 10A

CYCLE LIFE


To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

TRANSPORT INFORMATION

This battery is NON-SPILLABLE as defined in IATA Dangerous Goods Regulations Packing Instructions 806, Special Provision A67.

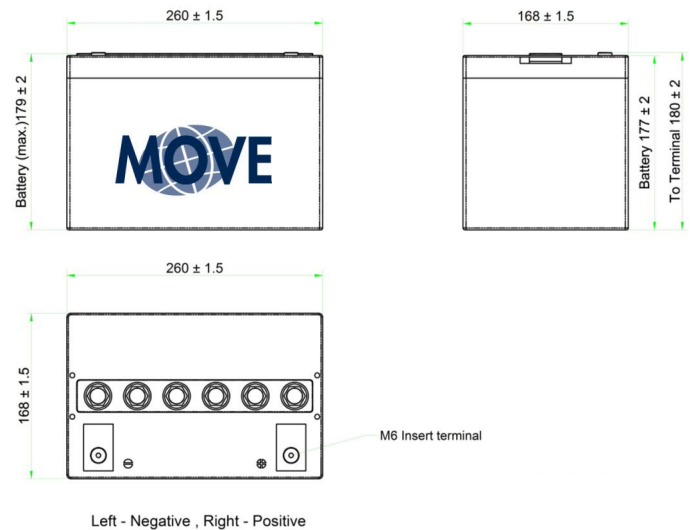

BATTERY LIFE UNDER CYCLIC USE

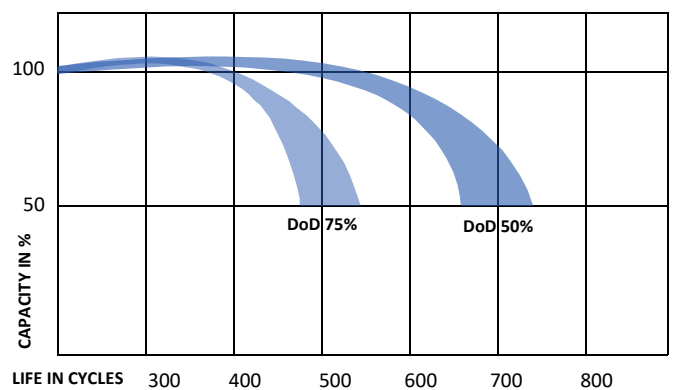

* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn