

# MOVE

# MPA 85-12

12V-85Ah - Cyclic AGM Battery

## APPLICATIONS

Powerchairs / home mobility equipment  
 Scooters, 3- and 4 wheels  
 Cleaning Machines  
 Lifts (stairs / bathrooms)  
 Personal Carriers  
 Utility Vehicles

## SPECIFICATIONS

Nominal Voltage	12V	
Nominal capacity @20 hour rate	85Ah	
Capacity at 25°C	10 hour rate	77Ah
	5 hour rate	67Ah
	1 hour rate	48Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 5,5 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

## DIMENSIONS




Dimensions LxWxH (T) in mm	260x171x211 (215)
Weight	26,1kg (±2%)
Separator	AGM, Glass Mat
Case and cover	ABS
Terminal	M6 Bolt
Torque setting (recommended)	M6: 7 Nm
Maximum allowable torque value	M6: 9 Nm

## CHARGING

Charging Voltage cycle use 14,4 to 15 Volt  
 Float charge Voltage 13,5 to 13,8 Volt  
 Charging current, minimum 8A - maximum 12A


## CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

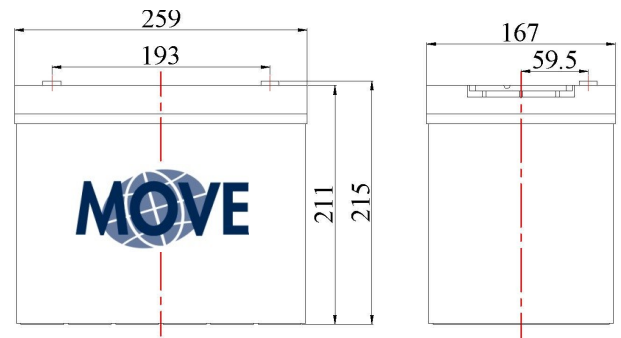

## BATTERY LIFE UNDER CYCLIC USE

Tested in conformance to the BCI testing method

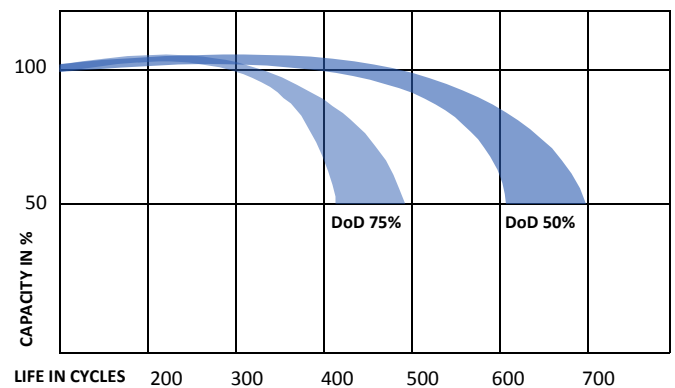

\* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn